


SKINTOP® DIX-M AUTOMATION

Multiple sealing insert with longitudinal cut for assembled data cables, IP 68 sealing.



Supplementary automation components from Lapp

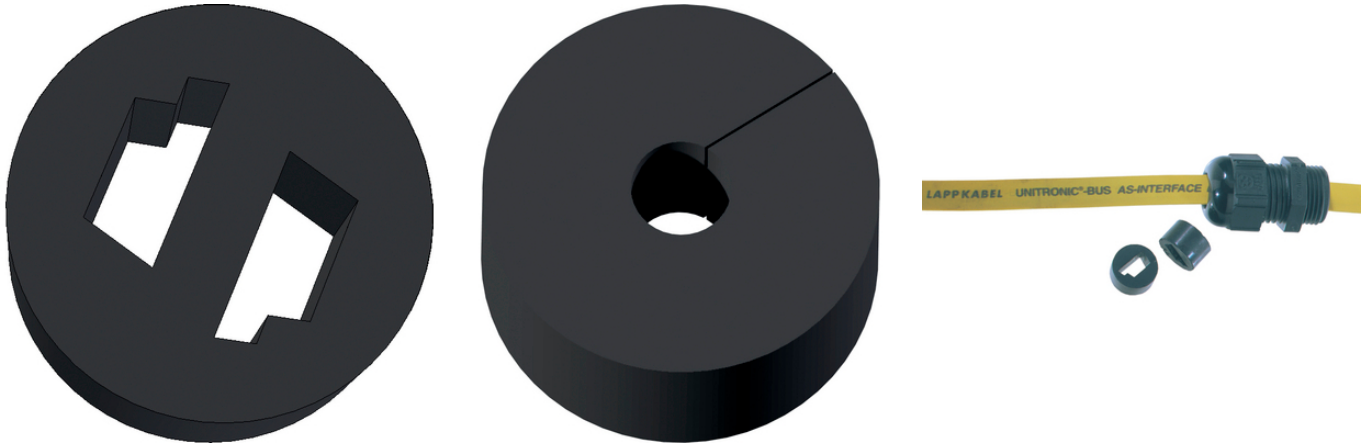

Assembly time



Optimum strain relief



Temperature-resistant



UV-resistant

Benefits

Special design with a round pilot hole and longitudinal cut for an easy insertion of one or more assembled data cables. Protection class IP 68 can be achieved if the holes are optimally covered. High functional safety thanks to optimal strain relief.

Application range

For use with metric SKINTOP®/SKINTOP® CLICK cable glands.
To be used instead of the standard sealing insert in the SKINTOP® cable gland.
UV and oil resistant material.

Product Make-up

Precise cut for AS-I bus cables
Seal with hole and cut for easy insertion of pre-assembled field bus cables

Technical Data

Classification ETIM 5:

ETIM 5.0 Class-ID: EC000032

ETIM 5.0 Class-Description: Plug for cable screw gland

Classification ETIM 6:

ETIM 6.0 Class-ID: EC000032

ETIM 6.0 Class-Description: Plug for cable screw gland

On request:

Special shapes

Last Update (27.05.2023)

©2023 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

SKINTOP® DIX-M AUTOMATION

Colour delivered:	Black, RAL 9005
Material:	NBR
Protection rating:	IP 54 IP 66 and IP 68 - 5 bar, 30 min (only applies to slotted DIX inserts if the specified clamping range is observed)
Temperature range:	-40°C to +100°C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products. Prices are net prices without VAT and surcharges. Sale to business customers only.

SKINTOP® DIX-M AUTOMATION

Article number	Article designation / size	Number of cables x cable Ø (mm)	Pieces / PU
SKINTOP® DIX-M ASI			
53611001	M 20	1	50
SKINTOP® DIX-M ASI DUO			
53611004	M 25	2	50
53440980	M 25	1	50
53440970	M 32	1 x 4.5 - 6.5	50
53611006	M 32	1 x 5.0 - 8.5	50
53611005	M 32	1 x 6.0 - 11.0	50
53611007	M 32	3 x 6.0 - 8.0	50
53310444	M 40	3 x 7.0 - 10.0	25
53611008	M 40	4 x 6.5 - 9.0	25

Last Update (27.05.2023)

©2023 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03_16

SKINTOP® DIX-M AUTOMATION

