


EPIC® DATA CAN M12T

M12 T parallel distributor for CAN/ DeviceNet/ S/A cabling

T-connector M12 as parallel distributor for DeviceNet and CANopen in robust design (IP65/IP67)

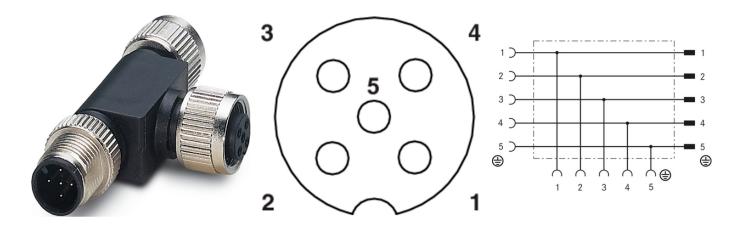

celler CRMopen



Supplementary automation components from Lapp



Assembly time



Space requirement

Benefits

Cost-effective, efficient wiring of fieldbus and sensor/ actuator installations Space-saving due to compact dimensions. Robust design

Product features

For CANopen/DeviceNet applications PWIS-free

Product Make-up

5-pin parallel distributor M12 socket on M12 plug and M12 socket

Technical Data

Material:

Classification ETIM 5: ETIM 5.0 Class-ID: EC002585

ETIM 5.0 Class-Description: Passive sensor-actuator interface

Classification ETIM 6: ETIM 6.0 Class-ID: EC002585

ETIM 6.0 Class-Description: Passive sensor-actuator interface

Contact: CuZn

Contact surface: Ni/Au Contact carrier: TPU GF

Last Update (21.02.2024)

©2024 Lapp Group - Technical changes reserved Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16





EPIC® DATA CAN M12T

Knurl: Zinc die-cast, nickel-plated

Gripping body: TPU, flame-retardant, self-extinguishing

Sealing: NBR

Protection rating: IP65/IP67

Ambient temperature (operation): Plug/socket -25°C to +90°C

Coding: A - Standard

(CANopen/DeviceNet/CC-Link)

Rated current (A): 4 A

Note

DeviceNet is a registered trademark of ODVA

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.



EPIC® DATA CAN M12T

PU Article designation Number of pins Rated voltage (V) Article number T distributor AB-C5-M12T-2XM12FS DN 5 60 5 22260765