

## EPIC® POWER LS3 D6

Circular connectors for servomotors and power supply


EPIC® LS3 cable connector for female contacts

### Info

Robust power supply connector

The contacts have to be ordered separately

Made in Germany

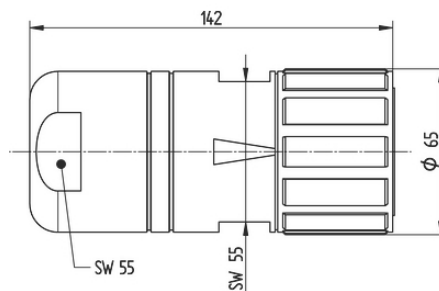

Robust



Reliability



Interference signals



Waterproof

### Benefits

more power for servo motors

Robust against mechanical impacts

EMC protection

### Application range

Plant engineering

Servo drives and servo assemblies

### Technical Data

Classification ETIM 5:

ETIM 5.0 Class-ID: EC002635

ETIM 5.0 Class-Description: Circular connector (industrial connector)

Classification ETIM 6:

ETIM 6.0 Class-ID: EC002635

ETIM 6.0 Class-Description: Circular connector (industrial connector)

Last Update (23.04.2024)

©2024 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

## EPIC® POWER LS3 D6

Rated voltage (V):	630 V (10 mm contacts) 250 V (1.6 mm contacts)
Rated impulse voltage:	6 kV (10 mm contacts) 4 kV (1.6 mm contacts)
Rated current (A):	150 A (10-mm contacts) at 25 °C 12 A (1.6-mm contacts) at 25 °C
Pollution degree:	3
Contacts:	Silver-plated brass Gold-plated brass
Number of contacts:	3+PE+2(10mm/1.6mm) 3+PE+4(10mm/1.6mm)
Termination methods:	Crimp termination 10 - 50 mm <sup>2</sup> (10 mm contacts) Crimp termination 0.75 - 1.5 mm <sup>2</sup> (1.6 mm contacts)
Material:	Housing: anodised aluminium Insert: PA Seal: FPM
Protection rating:	IP 67
Cycle of mechanical operation:	50
Temperature range:	-20 °C až la +120 °C

### Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.  
Prices are net prices without VAT and surcharges. Sale to business customers only.

**EPIC® POWER LS3 D6**

Article number	Article description	Clamping range min	Clamping range max	Pin configuration	Pieces / PU
Type LS3 D6 for female contacts					
44429344	LS3 D6	17	25	3+PE+2	1
44429345	LS3 D6	25	36	3+PE+2	1
44429346	LS3 D6	17	25	3+PE+4	1
44429347	LS3 D6	25	36	3+PE+4	1