


# **EPIC® H-B 16 SGRL**

Housing design H-B. The industry standard.

The metal housing for rectangular connectors can be used, for example, in investment construction. The housing has 2 double levers and 2 cable entries.

### Info

Double lever version with 2 levers for increased safety For easy introduction of two cables Protection rating UL50E tested

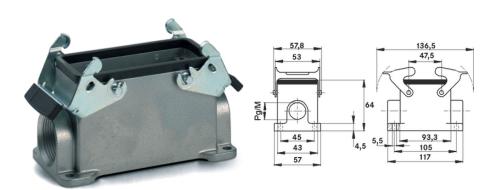





Supplementary automation components from Lapp



Mechanical and plant engineering



Mechanical resistance



Robust



Waterproof

# **Benefits**

The housing standard. Wide choice for all applications

# **Application range**

Plant engineering Light & sound technology Plastics industry

Last Update (16.07.2024)
©2024 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02\_03.16



# **EPIC® H-B 16 SGRL**

# **Product features**

Surface-mount base, low version Dual levers 2 cable entries

**Technical Data** 

Classification ETIM 5: ETIM 5.0 Class-ID: EC000437

ETIM 5.0 Class-Description: Housing for industrial connectors

Classification ETIM 6: ETIM 6.0 Class-ID: EC000437

ETIM 6.0 Class-Description: Housing for industrial connectors

Material: Housing: powder-coated aluminium alloy, grey

Lever: zinc-plated steel

Sealing: NBR

Protection rating: IP 65 (latched)

NEMA 250, UL50E: 12, 4 (latched)

VDE-tested: Certified production control: VDE-REG. no.: B437

UL-tested:

UL File Number: E75770

Temperature range: -40 °C to +100 °C, short-term up to +125 °C

### Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products. Prices are net prices without VAT and surcharges. Sale to business customers only.



# EPIC® H-B 16 SGRL

# Article number Article description M PG Packaging unit H-B housing: surface-mount base (2 cable entries, double lever) 10075000 H-B 16 SGRL 21 - 21 5 19075000 H-B 16 SGRL M25 25 - 5