


EPIC® H-B 48 SDRL-LB

Housing design H-B for 2 inserts.

The robust large housing with 2 cable entries, a single lever and a thermoplastic cap is ideal for use in the plastics industry.

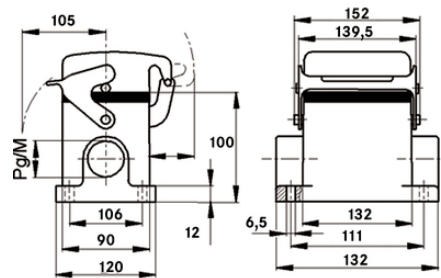

Benefits

The large, robust housing for two inserts in one connector. Power and data in a single connector

Application range

Plant engineering
Plastics industry

Product features

Surface-mount base
Single lever
2 cable entries
Plastic cover

Technical Data

Classification ETIM 5:

ETIM 5.0 Class-ID: EC000437

ETIM 5.0 Class-Description: Housing for industrial connectors

Classification ETIM 6:

ETIM 6.0 Class-ID: EC000437

ETIM 6.0 Class-Description: Housing for industrial connectors

Material:

Housing: powder-coated aluminium alloy, grey

Lever: zinc-plated steel

Sealing: NBR

Protection rating:

IP 65 (latched)

Temperature range:

-40°C to +100°C, short-term up to +125°C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products. Prices are net prices without VAT and surcharges. Sale to business customers only.

EPIC® H-B 48 SDRL-LB

Article number	Article description	M	PG	Pieces / PU
H-B housing: surface-mount base (cover, 2 cable entries, single lever)				
10168000	H-B 48 SDRL 29	-	29	1
10168100	H-B 48 SDRL 36	-	36	1
19168000	H-B 48 SDRL M32	32	-	1
19168100	H-B 48 SDRL M40	40	-	1

Last Update (14.10.2019)

©2019 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16