


EPIC® STA 6 Screw termination

The proven STA inserts with spring contacts

The insert with screw termination is a tried-and-tested choice thanks to its strong contact springs. It can be used, for example, in control cabinets.

Info

For reliable signal transmission in harsh environmental conditions
 Mechanically robust spring contacts
 Made in Germany

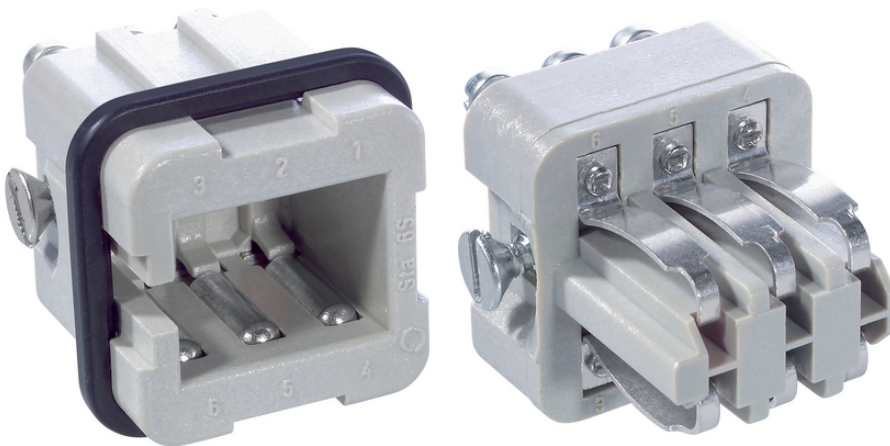

Mechanical and plant engineering

Benefits

good contact due to the strong contact springs.
 The proven STA inserts with spring contacts

Application range

Control systems
 Rack technology
 Electronic laboratory

Technical Data

Classification ETIM 5:

ETIM 5.0 Class-ID: EC000438

ETIM 5.0 Class-Description: Contact insert for industrial connectors

Classification ETIM 6:

ETIM 6.0 Class-ID: EC000438

ETIM 6.0 Class-Description: Contact insert for industrial connectors

Rated voltage (V):

IEC: 24 V AC, 60 V DC

UL: 48 V

CSA: 48 V

Rated current (A):

IEC: 10 A

Last Update (13.07.2024)

©2024 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

EPIC® STA 6 Screw termination

	UL: 10 A
	CSA: 10 A
Pollution degree:	2
Contact resistance:	< 3 mOhm
Contacts:	Copper alloy, tinned
Number of contacts:	6
Termination methods:	Screw termination: 0.5 - 1.5 mm ²
Stripping length (mm):	5
Cycle of mechanical operation:	100
VDE-tested:	UL-tested:
	UL File Number: E75770
Temperature range:	-40°C up to +80°C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products. Prices are net prices without VAT and surcharges. Sale to business customers only.

EPIC® STA 6 Screw termination

Article number	Article description	Contact type	Number of operating contacts	Packaging unit
STA 6 screw termination				
10486100	STA 6 SS	male	1 - 6	10
10488100	STA 6 FS	Spring	1 - 6	10

Last Update (13.07.2024)

©2024 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03_16