


ETHERLINE® P Flex Cat.5e M12

Industrial Ethernet Patchcord M12

Industrial Ethernet Patchcord, Cat.5e, plug M12, D-coded, PUR, flexible

Info

Halogen-free and flame-retardant
Additional variants are available at
www.lappgroup.com/assemblyfinder
or on request.

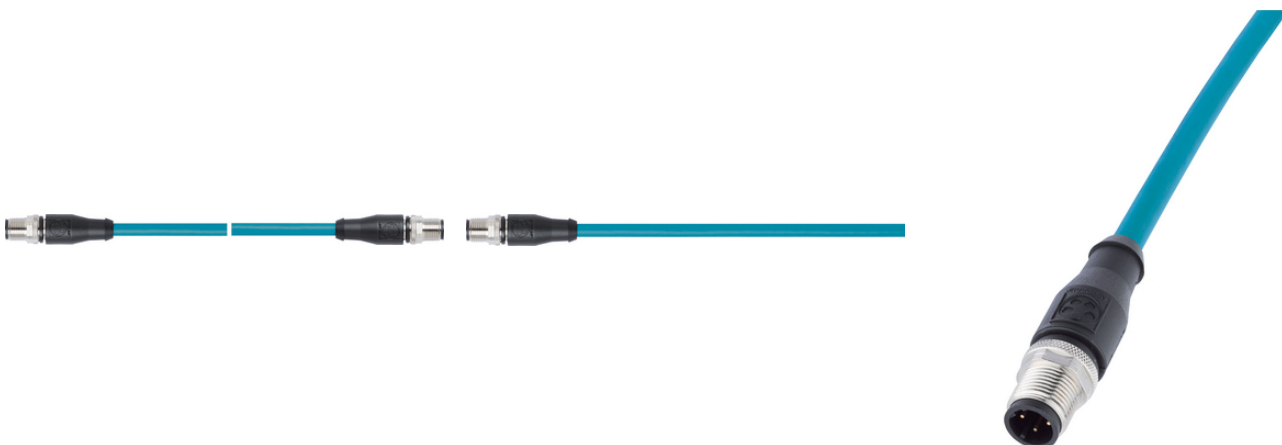

 Ethernet/IP



Supplementary automation components from Lapp



Mechanical and plant engineering



Halogen-free



Mechanical resistance



Assembly time



Interference signals



Waterproof

Benefits

Non-permanent connections allow for easy change of equipment
For directly connecting two electric components

Last Update (24.04.2024)

©2024 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

ETHERLINE® P Flex Cat.5e M12

Application range

suitable for EtherCAT and EtherNet/IP applications
Suitable for use in industrial applications
For indoor use
For flexible applications

Product features

Meets the requirements according to Cat. 5e and class D
2pair: 10/100 Mbit/s for Industrial Ethernet

Product Make-up

Braided conductor, 2x2x AWG26/7
Twisted pair construction permits largely interference-free operation (decoupling).
Overall screening with copper braid and plastic-laminated aluminium foil
Outer sheath made of PUR
Colour: water blue (similar to RAL 5021)
Pre-assembled connection and patch cable with M12 D-coded connectors with vibration protection

Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC002599 ETIM 5.0 Class-Description: Patch cord copper (twisted pair) industry
Classification ETIM 6:	ETIM 6.0 Class-ID: EC002599 ETIM 6.0 Class-Description: Patch cord copper (twisted pair) industry
Minimum bending radius:	Flexing: 15 x outer diameter Fixed installation: 8 x outer diameter
Protection rating:	IP69
Temperature range:	Flexing: -5 °C to +50 °C (UL: +80 °C) Fixed installation: -30 °C to +80 °C

Note

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.

Copper price basis: EUR 150/100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.

Other lengths and types of connectors are available upon request.

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

ETHERLINE® P Flex Cat.5e M12

Article number	Article designation	Length (m)	Copper index kg/1.000 pieces
straight plug M12 on straight plug M12			
2171097	IE-5-M12D-S-1-P-2-26-7-M12D-S	1	19
2171098	IE-5-M12D-S-2-P-2-26-7-M12D-S	2	38
2171099	IE-5-M12D-S-3-P-2-26-7-M12D-S	3	57
2171100	IE-5-M12D-S-5-P-2-26-7-M12D-S	5	95
2171101	IE-5-M12D-S-10-P-2-26-7-M12D-S	10	190
2171102	IE-5-M12D-S-20-P-2-26-7-M12D-S	20	380
straight plug M12 on free conductor end			
2171103	IE-5-M12D-S-1-P-2-26-7-OE	1	19
2171104	IE-5-M12D-S-2-P-2-26-7-OE	2	38
2171105	IE-5-M12D-S-3-P-2-26-7-OE	3	57
2171106	IE-5-M12D-S-5-P-2-26-7-OE	5	95
2171107	IE-5-M12D-S-10-P-2-26-7-OE	10	190
2171108	IE-5-M12D-S-20-P-2-26-7-OE	20	380

Last Update (24.04.2024)

©2024 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

ETHERLINE® P Flex Cat.5e M12

